

ELO LH

Quick Response

Extended Coverage Light Hazard

Extra Large Orifice

Recessed Pendent and Pendent

Glass Bulb Automatic Sprinkler

Manufactured by: Central Sprinkler Company
451 North Cannon Avenue, Lansdale, Pennsylvania 19446

Product Description

The Central Model ELO LH Extra Large Orifice Recessed Pendent and Pendent Automatic Glass Bulb Sprinklers are specifically designed for Extended Coverage/Light Hazard as defined by NFPA 13. They are Listed as Quick Response, up to 18'x18' spacing, and as Standard Response, above 18'x18' spacing. The ELO LH is Listed for smooth flat horizontal ceilings as are all Extended Coverage Light Hazard Sprinklers.

The ELO LH provides the maximum in design flexibility as it has a minimum separation of only 11'-0" and is Listed for flows and pressures associated with 16'x16', 18'x18' and 20'x20' spacing.

They are intended for use with hydraulically designed systems using the flows and pressures as shown in this literature. For the purpose of determining the correct flow and pressure to use in the hydraulic calculations, all spacing is rounded up to the next higher category. For example, 17'-6"x15'-0" spacing would be calculated at the Listed 18'x18' flow and pressure.

The advantage of the ELO LH is the ability to cover large areas, up to 400 square feet, with pressures that compare to 1/2" standard sprinklers spaced at their maximum of 225 square feet. For example, the ELO LH can cover 20'x20' spacing or 400 square feet with less pressure than is required with 1/2" sprinklers at 225 square feet. (12.3 vs. 16.1)

The Model ELO LH Sprinkler incorporates a specially designed deflector that provides a much greater area of coverage than standard commercial sprinklers. The two (2) piece recessed escutcheon assembly provides for 3/4" of field adjustment.

Technical Data

Model: ELO LH
Style: Recessed Pendent, Pendent
Escutcheon: Model ELO (2-piece)
Recessed

Escutcheon Part #'s:

850 - Brush Brass	853 - White
851 - Bright Chrome	848 - Off-White
852 - Bright Brass	849 - Black

Note: *In the recessed position, only the Model ELO (2-piece) Recessed Escutcheon may be used. Substitution of other "recessed" escutcheons may impair the operating sensitivity and distribution pattern.*

Wrench

Pendent: Part #1073
ELO/ELO/ESFR Combination

Recessed Pendent: Part #1092
ELO Offset

Orifice Size: 0.64" (16.3 mm) (ELO)

K-Factor: 11.4 (163.02)

Thread Size: 3/4" N.P.T. (19.1 mm)

Temperature Rating:

155°F/68°C

200°F/93°C (Available as Standard Response Only)

250°F/121°C (Available as Standard Response Only)

Approvals: U.L., cUL

Maximum Working Pressure: 175 psi

Factory Hydro Test: 100% at 500 psi

Standard Finishes:



Sprinkler: brass or chrome plated
Decorative Finishes: white or black painted

Escutcheon: brass, chrome plated,
white or black painted

Length: 2 3/4" (70 cm)


Width: 1 1/2" (3.80 cm)

Weight: 4.2 oz. (120 grams)

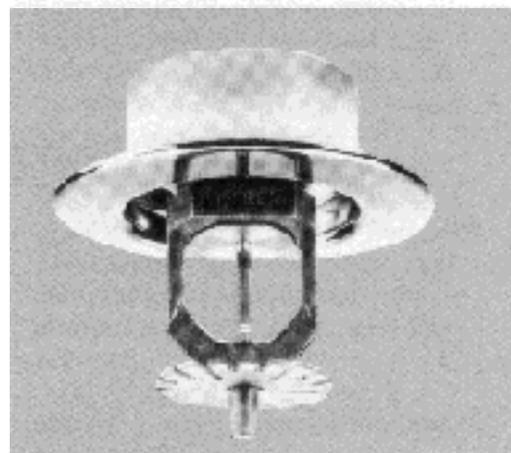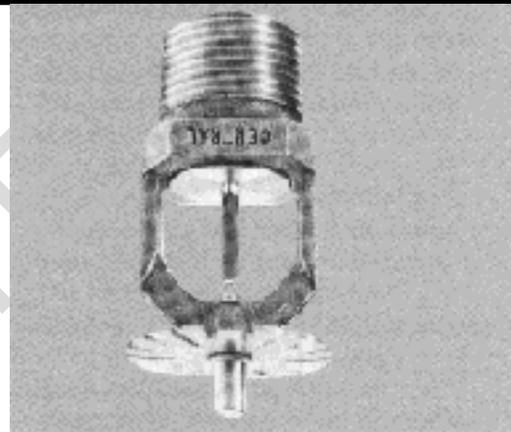


**Quick Response
Extended
Coverage Light
Hazard Recessed
Pendent and
Pendent
Sprinkler**

Installation Diagrams ELO LH Extended Coverage Light Hazard Recessed Pendant

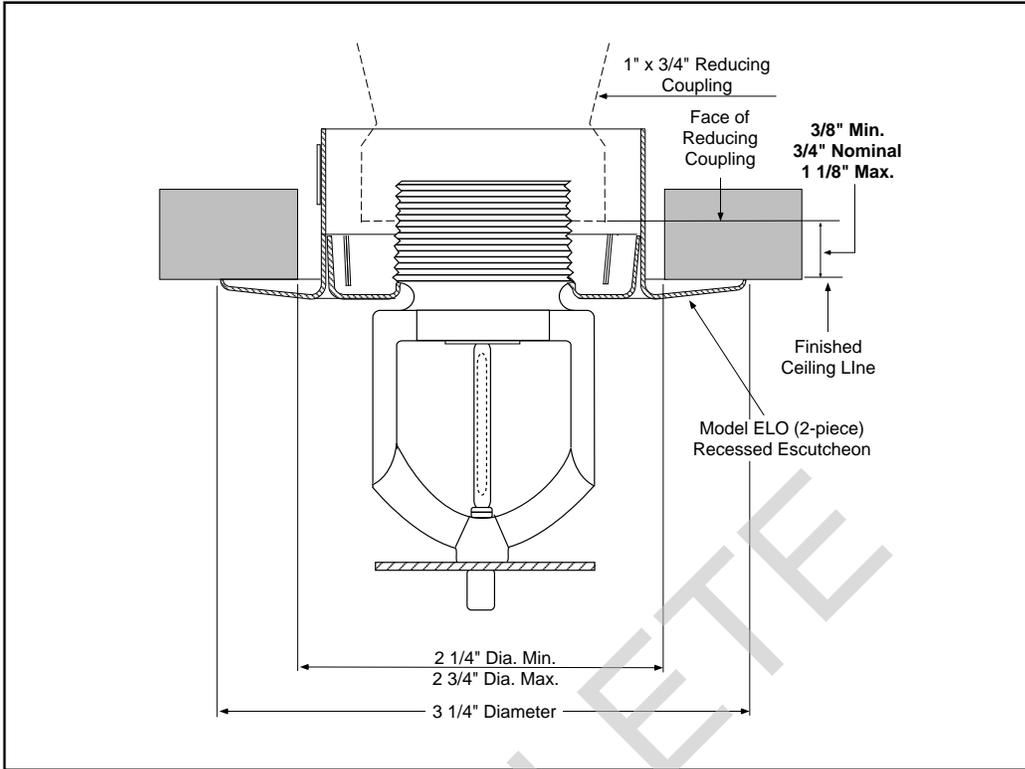

Installation Diagrams ELO LH Extended Coverage Light Hazard Pendant

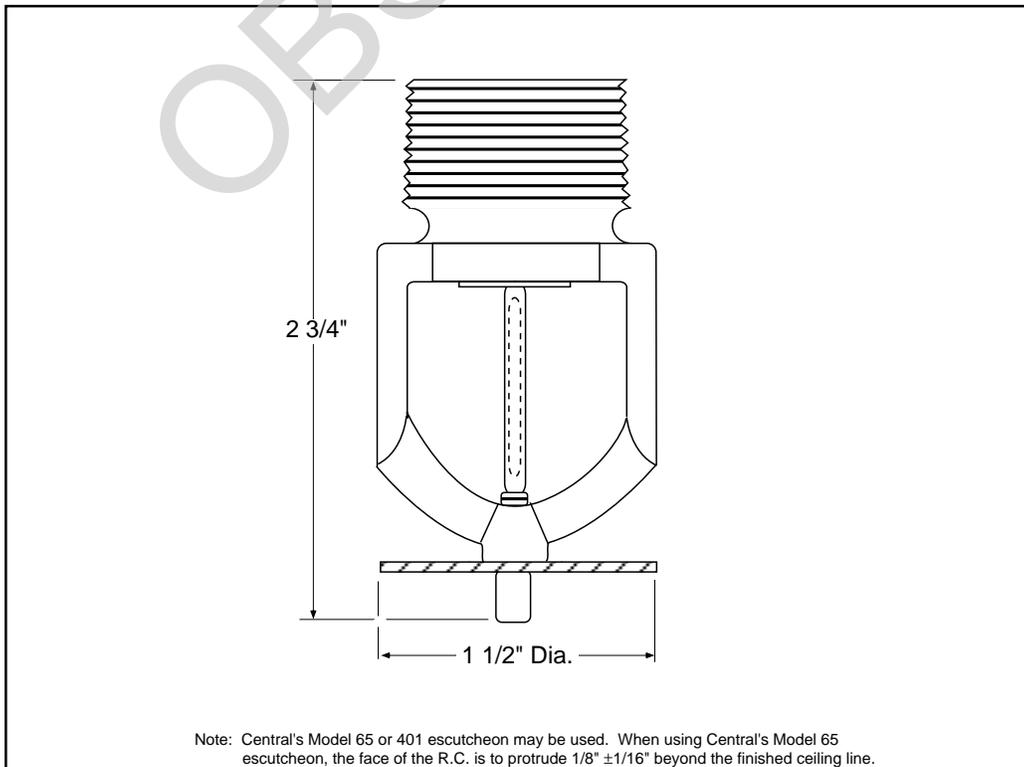



Design Requirements — Light Hazard Extended Coverage Applications

Density .1 GPM/ft² - NFPA 13 All Editions

Temperature Rating 155°F/68°C, 200°F/93°C, 250°F/121°C Temperatures

Spacing Between Sprinklers	Maximum Location From Any Wall	Minimum Design Flow per Sprinkler (gpm)	Minimum Design Pressure per Sprinkler (psi)
*16 x 16 feet (256 sq. ft.)	8 feet	30.2 gpm	7 psi
*18 x 18 feet (324 sq. ft.)	9 feet	33.0 gpm	8.4 psi
**20 x 20 feet (400 sq. ft.)	10 feet	40.0 gpm	12.3 psi

* Listed as Quick Response.

** Listed as Standard Response Only.

≠ Recessed Pendent Sprinkler is Listed as Standard Response Only.

Caution: Minimum spacing between pendent and recessed pendent sprinklers is 11'-0".

The Model ELO LH incorporates the latest in heat-responsive glass bulb technology. The operating mechanism consists of a 3 mm liquid-filled frangible capsule that is only 2.0 cm in length.

Operation: The glass bulb capsule operating mechanism contains a heat-sensitive liquid that expands upon application of heat. At the rated temperature, the frangible capsule ruptures, thereby releasing the orifice seal. The sprinkler then discharges water in a pre-designed spray pattern to control the fire.

sized to ensure the minimum required flow rate at the sprinkler. Check for the proper model, style, orifice size, and temperature rating prior to installation. Install sprinklers after the piping is in place to avoid mechanical damage; replace any damaged units.

Wet pipe systems must be protected from freezing.

Upon completion of the installation, the system must be tested per recognized standards.

In the event of a thread leak, remove the unit, apply new pipe joint compound or tape, and reinstall.

Installation Sequence

Step 1. For Pendent and Recessed Pendent sprinklers, the face of the sprinkler fitting should be installed a nominal 3/4" (±3/8") behind the ceiling line. Adjustments are made via the push-on escutcheon.

Step 2. Use only a non-hardening pipe joint compound or Teflon* tape. Apply only to the male threads.

Step 3. Hand tighten the sprinkler into the fitting. Use a Central Sprinkler Wrench, to tighten the unit into the fitting. A leak-tight joint requires only 7 to 14 ft.-lbs. of torque; a tangential force of 14 to 28 lbs. delivered through a 6" handle will deliver adequate torque. Torque levels over 21 ft.-lbs. may distort the orifice seal, resulting in leakage.

*Teflon is a trademark of the DuPont Corp.

Sprinklers must be handled carefully. They must not be transported or stored where ambient temperature may exceed 100°F/38°C. For best results, store them in a dry, cool location in the original shipping package.

Do not install sprinklers that have been dropped or visibly damaged. Sprinklers must never be painted, coated, plated, or altered in any other way from manufactured condition or they may not function properly. Any sprinklers altered in such manner must be replaced.

The owner is responsible for the proper operating condition of all fire protection devices and accessories. The NFPA standard 25 entitled, "Inspection, Testing and Maintenance of Water-Based Fire Protection Systems", contains guidelines and minimum maintenance requirements. Furthermore, the local Authority Having Jurisdiction may have additional regulations and requirements for maintenance, testing, and inspection that must be obeyed.

It is advisable to have sprinkler systems inspected regularly by a qualified inspection service. Length of time between such inspections can vary due to accessibility, ambient atmosphere, water supply, and site activity.

Do not attempt to reassemble or otherwise reuse a sprinkler that has operated. Replace any sprinkler exhibiting corrosion or damage; always use new sprinklers of the same type and temperature rating as replacements.

Because the discharge pattern is critical to protection of life and property, nothing should be hung or attached to the sprinkler unit that would disrupt the pattern. Such obstructions must be removed. In the event that construction has altered the original configuration, the system must be investigated and the protection level maintained.



All Central Model ELO LH Recessed Pendent and Pendent Automatic Sprinklers must be installed according to the current NFPA 13 Standard and these installation instructions. Deviations from these requirements and standards or any alteration to the sprinkler itself will void any warranty made by Central Sprinkler Company. In addition, installation must also meet local government provisions, codes, and standards as applicable.


The system piping must be properly

Do not attempt to replace sprinklers without first removing the fire protection system from service. Be certain to secure permission from all authorities having jurisdiction, and notify all personnel who may be affected during system shutdown. A fire watch during maintenance periods is a wise precaution.

To remove the system from service mode, first refer to the system operating guide and valve instruction. Drain water and relieve pressure in the pipes. Remove the existing unit and install the replacement, using only the special sprinkler wrench. Be certain to match model, style, orifice, and temperature rating.

A fire protection system that has been shut off after an activation should be returned to service immediately. Inspect the entire system for damage and replace or repair as necessary. Sprinklers that did not operate but were subjected to corrosive elements of combustion or excessive temperatures should be inspected, and replaced if need be. The *Authority Having Jurisdiction* will detail minimum replacement requirements and regulations.

Guarantee: Central Sprinkler Company will repair and/or replace any products found to be defective in material or workmanship within a period of one year from the date of shipment. Please refer to the current Price List for further details of the warranty.



Ordering Information

Ordering Information: When placing an order, indicate the full product name. Please specify the quantity, model, style, orifice size, temperature rating, type of finish or coating, and sprinkler wrench.

Availability and Service: Central sprinklers, valves, accessories, and other products are available throughout the U.S. and Canada, and internationally, through a network of Central Sprinkler distribution centers. You may write directly to Central Sprinkler Company, or call (215) 362-0700 for the distributor nearest you.

Patents: Patents are pending.

Conversion Table:

1 inch = 25.400 mm
1 foot = 0.3048 M
1 pound = 0.4536 kg
1 foot pound = 1.36 Nm
1 psi = 6.895 kpa
= 0.0689 bar
= 0.0703 kg/cm²
1 U.S. gallon = 3.785 dm³
= 3.785 liters

Conversions are approximate.

OPTIMA™ is a registered trademark of Central Sprinkler Company.



Central Sprinkler Company

451 North Cannon Avenue, Lansdale, PA 19446
PHONE (215) 362-0700
FAX (215) 362-5385