



Bending Straight to the Point.


Model FH-1 Flexible Sprinkler Hose



Model FH-1 Flexible Sprinkler Hose



NEW

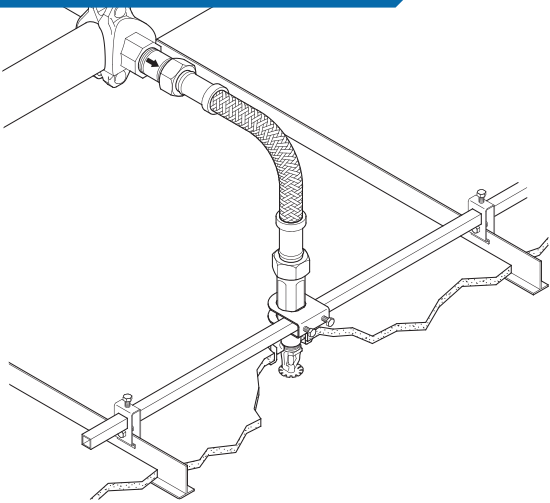

Save time and costs with the Model FH-1 Flexible Sprinkler Hose for sprinkler systems used with false ceilings. No need for cutting and threading pipe nor the use of elbows and fittings associated with installing a drop – the Model FH-1 simply connects from the branch line to the sprinkler. Simplicity and adaptability makes the Model FH-1 ideal for use in areas such as offices, schools, libraries, hospitals or shopping complexes.

Saves you time and money

- Saves installation time
- No need for measuring, cutting or threading of pipes, oils or cleaning agents
- No need for expensive bulky machinery on site
- No need for elbows or fittings

Flexibility in more ways than one

- Easy manipulation of hose to avoid obstructions or other services
- Ideal for tight ceiling spaces
- System can be installed before the ceiling works
- System can be charged with water and tested before the ceiling is installed
- Sprinkler can be repositioned without need to drain the system water

Technical Specifications

Approvals	: UL, FM
Nominal Assembly Lengths	: 700mm, 1,000mm, 1,200mm, 1,500mm, 1,800mm
Styles	: Braided, Unbraided
Inlet Connections	: ISO 7/1-R 1
Outlet Connections	: ½ inch NPT, ¾ inch NPT
Maximum Service Pressure	: Braided: 13.8 bar (200psi), Unbraided: 12.1bar (175psi)
Maximum Ambient Temperature	: 107°C (225°F)

SINGAPORE

Tel. +65-6577-4360,
Fax: +65-6481-8791
E-mail : info.apac@tycofp.com

CHINA

Tel : +86 21 6163 3373
Fax : +86 21 6163 3371
E-mail : info.china@tycofp.com

AUSTRALIA

Tel : 1300 725 688 (within Australia)
Tel : +61 3 9313 9700
Fax : +61 3 9313 9709
E-mail : info.aust@tycofp.com

HONG KONG

Tel : +852 2753 3524
Fax : +852 2505 5826
E-mail : info.china@tycofp.com

INDIA

Tel : +91 22 6628 6628
Fax : +91 22 6628 6650
E-mail : info.india@tycofp.com

TAIWAN

Tel: +886 2 2792 7929
Fax: +886 2 7720 0918
E-mail: info.china@tycofp.com